




PCT/IB 0 4 / 0 4 2 2-2



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 3 November 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)





INVESTOR IN PEOPLE

GB 0329888.2

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of:

GDX NORTH AMERICA INC.,
615 South DuPont Highway,
Dover,
Delaware 19901,
United States of America

Incorporated in USA - Delaware,

[ADP No. 08969388001]






28DEC03 EB61870-7 D02855
POL/7700 0.00-0329888.2 CHEQUE

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

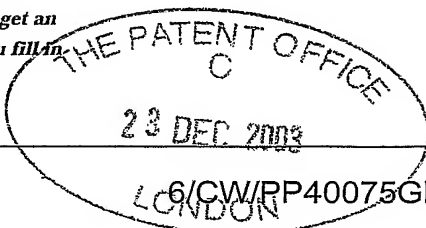

1. Your reference

6/CW/PP40075GB

23 DEC 2003

2. Patent application number

(The Patent Office will fill in this part)

0329888.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

GENCORP PROPERTY INC.
P O Box 537012
Sacramento, California 95853-7012
U.S.A.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

California, U.S.A.

806890001

4. Title of the invention

SEALING, TRIMMING OR FINISHING STRIPS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

MATHISEN & MACARA
The Coach House
6-8 Swakeleys Road
Ickenham, Uxbridge
UB10 8BZ

Patents ADP number (if you know it)

1594001

1093001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 14

Claim(s) 4

Abstract 1

Drawing(s) 10 + 10 RM

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

MATHISEN & MACARA 23rd December 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

MR M.C. FOSTER (01895 678331)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

SEALING, TRIMMING OR FINISHING STRIPS

The invention relates to sealing, trimming or finishing strips to be used for carrying out sealing, trimming or finishing functions in motor vehicle bodies.

According to the invention, there is provided a sealing, trimming or finishing strip comprising a longitudinally extending sealing part defining a longitudinal hollow interior which becomes partially compressed in use, the hollow interior of the sealing part being provided with means for controlling the compression of the sealing part.

The compression controlling means may provide a "stop" which prevents or substantially reduces any further compression of the sealing part beyond a desired amount. For example, when a vehicle closure member closes an opening in the vehicle body, a peak compression force may be applied to the sealing part during the closing operation (for example, by a user to ensure that the closure member will be securely latched closed – such as when a car door is slammed shut). This peak force is applied only momentarily, and the compression controlling means may limit the amount of compression of the sealing part at this time, whereafter the force applied will be reduced.

Sealing, trimming or finishing strips embodying the invention, for use in carrying out sealing functions in motor vehicle bodies, will now be described,

by way of example only, with reference to the accompanying diagrammatic drawings in which:

Figure 1 is a side elevational view of a vehicle to which the sealing, trimming or finishing strips may be fitted;

Figure 2 is a perspective view of part of a sealing, trimming or finishing strip;

Figure 3a is a cross-sectional view, along line I-I of Figure 1, of a sealing, trimming or finishing strip carrying out a sealing function in a vehicle body, in which the vehicle door is exerting normal pressure on the sealing, trimming or finishing strip;

Figure 3b is the cross-sectional view of Figure 3a, in which the vehicle door is exerting a slight over-pressure on the sealing, trimming or finishing strip;

Figure 3c is the cross-sectional view of Figure 3a, in which the vehicle door is exerting a greater over-pressure on the sealing, trimming or finishing strip;

Figure 3d is the cross-sectional view of Figure 3a, in which the vehicle door is exerting a substantial over-pressure on the sealing, trimming or finishing strip;

Figure 4 is a graph showing the force applied (F) to the sealing part of the strip in Figures 2 and 3a-3d plotted against the amount of deformation (d) of the sealing part of the strip;

Figure 5 is a cross-sectional view, along line I-I of Figure 1, of an alternative embodiment of a sealing, trimming or finishing strip;

Figure 6a is a cross-sectional view, along line II-II of Figure 1, of an embodiment of a sealing, trimming or finishing strip carrying out a sealing function on the boot of a motor vehicle body;

Figure 6b is a cross-sectional view of an alternative embodiment of a sealing, trimming or finishing strip carrying out a sealing function on the boot of a vehicle body; and

Figure 7 is a perspective view of part of an alternative configuration of a sealing, trimming or finishing strip of Figure 2.

In the figures like elements are generally designated with the same reference numeral.

Figure 1 shows a motor vehicle 2. A sealing, trimming or finishing strip as described hereinafter could be provided to the motor vehicle door region or the

vehicle boot region to provide a weather-tight seal, or to any other region where a closure member closes an opening in the body of the vehicle 2.

One form of the sealing, trimming or finishing strip 4 is shown in Figure 2. Such a sealing, trimming or finishing strip 4 could be applied to a motor vehicle door frame (i.e. the part of the vehicle body against which the door is closed). The strip 4 comprises a sealing part 6 and a mounting part 8.

The mounting part 8 is preferably formed by extrusion, although it could be formed by moulding or any other suitable technique.

The mounting part 8 is in the form of a longitudinal channel 10 having a base 60 from which opposite, generally parallel side walls 62,64 extend. In use, the mounting part 8 is embracingly clamped to the frame surrounding the motor vehicle door opening in the body. More specifically, the frame surrounding of the door opening normally comprises a flange where the inner and outer body panels are welded together.

The mounting portion 8 comprises a reinforcing core or carrier 12 such as made of resilient metal or other resilient and relatively rigid material, which is embedded in the flexible material 14 of the mounting part 8, such as rubber or plastics material – for example TPE or EPDM. For example, the carrier 12 may be made of metal and in the form of (inverted) U-shaped elements

arranged side-by-side to define the channel 10 and connected together by integral short connecting links or disconnected from each other. Other forms of carrier are, of course, possible. The carrier may be made of wire looped to and fro, and may be incorporated in the material 14 using a cross-head extruder. The carrier need not be made of metal, for example a flexible but substantially non-extensible tape may be incorporated into the material 14.

The material 14 is formed to define integral gripping lips 16 and 18 positioned on the opposite inside facing walls 62,64 of the channel 10. The lips 16, 18 make contact with the opposite faces of the flange and increase the frictional gripping of the mounting part 8. Advantageously, the material of the lips 16, 18 is arranged to be softer than the remainder of the extruded material 14 to increase the frictional grip of the lips 16, 18 against the flange.

The sealing part 6 is of generally hollow tubular form and may be co-extruded with the mounting part 8. However, it is not necessary for the sealing part 6 to be co-extruded with the mounting part 8. Instead, the sealing part 6 may be made separately, by extrusion or moulding (or other suitable method) from appropriate material(s), and may then be secured to the mounting part 8 by adhesive, moulding, welding or any other suitable technique.

The sealing part 6 extends from wall 64 of the mounting part 8.

closing door thus partially compresses the sealing part 6 which thereby provides a weather-tight seal.

Figures 3a, 3b, 3c and 3d show cross-sectional views of the sealing, trimming or finishing strip of Figure 2 along the line I-I of Figure 1 in increasing states of compression as the motor vehicle door 28 is closed. In these examples, the mounting part 8 is mounted to the frame of the door opening defined by an inner body panel 30 and an outer body panel 32 at the point where the inner and outer body panels 30, 32 are welded together to form a flange 34.

Figure 3a defines the normal working condition, wherein the motor vehicle door 28 is exerting a normal pressure or force F_1 , on the sealing part 6 of the sealing, trimming or finishing strip. The normal working condition is the condition when the door 28 is closed with no additional pressure being exerted on the door 28. In this condition, the sealing part 6 is slightly deformed and resiliently presses against the door 28 prevent the ingress of moisture and dirt and to minimise wind noise within the vehicle cabin.

Figure 3b shows the situation where the door 28 is exerting a slight over-pressure or force F_2 on the sealing part 6 of the sealing, trimming or finishing strip. The force F_2 increases the deformation of the sealing part 6 which leads to a reduction of the distance between the outer surface 36 of the sealing part 6 and the interior wall 22 defining the first longitudinally extending hollow 24.

In Figure 3b, the outer internal surface 36 of the sealing part 6 and the interior wall 22 are in fact in contact. However, the force F_2 is not substantial enough to cause deformation of the interior wall 22.

Figure 3c shows the situation where the door 28 is exerting a greater over-pressure or force F_3 on the sealing part 6. The force F_3 is in excess of the force F_2 . The force F_3 causes deformation of the sealing part 6 to such an extent that the interior wall 22 is also deformed and the distance between the interior wall 22 and the inner internal surface 38 of the sealing part 6 defining the second longitudinally extending hollow 26 is also reduced. In Figure 3c, the interior wall 22 and the inner surface 38 of the sealing part 6 are in contact.

Figure 3d shows the situation where the door 28 is exerting a substantial over-pressure or force F_4 on the sealing part 6. The force F_4 is in excess of the force F_3 . The force F_4 causes further deformation of the sealing part 6. However due to the bulbous cross-section portion 27 and inherent resilience of the interior wall 22, the interior wall 22 acts as a stopper to inhibit any further deformation of the sealing part 6 occurring.

Figures 2,3a,3b,3c and 3d show respective distances d_0, d_1, d_2, d_3 and d_4 measured between the outer internal surface 36 and the inner internal surface 38 of the sealing part 6 at various stages of compression. Figure 4 is a graph showing the force applied (F) to the sealing part 6 of the strip in Figures 2,3a,3b,3c and

3d plotted against the reduction in distance (d) between the surfaces 36 and 38. For example, from this graph it can be seen that a relatively large force is required to cause a relatively small reduction in the distance between the walls 36 and 38 as the door 28 moves from the position shown in Figure 3c to the position shown in Figure 3d. This increase in force/decrease in distance reduction is due to this last phase of movement of the door requiring compression of the bulbous portion 27 itself. The bulbous portion can be seen to be acting as a "stopper" which controls in normal use the minimum distance allowed between the door 28 and the flange 34.

Figure 5 shows an alternative embodiment of a sealing, trimming or finishing strip in cross-section, along the line I-I of Figure 1. In this embodiment the sealing part 6 is not provided with the mounting part 8 for mounting the door on a door frame flange. Instead, the sealing part 6 is secured to the motor vehicle door 28 by adhesive 40, and the outer surface 36 of the sealing part 6 contacts the motor vehicle door frame 42 to perform the sealing function. The adhesive 14 may be double sided adhesive tape. The sealing part 6 may alternatively be secured to the door 28 by any other suitable means. For example, a flange could be provided on the door which engages the seal (or a mounting part provided on the seal), or a series of studs and correspondingly configured apertures could be provided in the sealing part 6 and the door 28, respectively, to allow those parts to be secured together.

The pressure is exerted on the sealing part 6 by the motor vehicle door frame 42. Deformation of the sealing part 6 occurs as a consequence of the pressure applied to the door 28 in the same manner as described hereinbefore in relation to Figures 3a to 3d. Again, the interior wall 22 acts as a stopper when substantial pressure is applied to the door 28 due to the bulbous cross-section portion 27 and inherent resilience of the interior wall 22.

Figures 6a and 6b show cross-sectional views of sealing, trimming or finishing strips, along the line II-II of Figure 1, where the sealing, trimming or finishing strips are carrying out a sealing function on the boot 46 of a motor vehicle.

In Figure 6a, the frame 44 of the opening in the vehicle body has a generally U-shaped cross-section and terminates in a flange 45. The flange 45 extends generally perpendicularly to the abutment surface of the boot 46. The sealing part 6 of a sealing, trimming or finishing strip 4A is mounted on the flange 45.

The strip defines an inverted U-shaped channel 10A defining a mounting part 8A. The mounting part 8A has a similar form and performs a similar function to the mounting part 8 of described above for mounting on the flange 34 of a door frame. However the sealing part 6A extends from the base 60 of the channel 10. The sealing part 6A comprises an interior wall 22 having a bulbous cross-section portion 27.

The sealing part 6A is compressed in response to varying applied pressure, in a similar manner as described above in relation to the sealing part 6, as the boot 46 is closed against the frame 44 in the direction of arrow X.

In Figure 6b, the frame 44A is generally L-shaped and terminates in a flange 45A.

The flange 45A extends generally parallel to the abutment surface of the boot 46. In this embodiment, the sealing portion 6B extends from the wall 64 of the mounting portion 8 to seal against the abutment surface of the boot 46. The sealing part 6B is provided with additional abutment lips 70,72 which abut against the surface of the frame 44A which extends perpendicularly to the flange 45A to help locate the sealing part 6B.

In both Figures 6a and 6b the bulbous portion 27 of interior wall 22 acts as a stopper when substantial pressure is applied to the boot 46 due to the bulbous cross-section and inherent resilience of the bulbous portion 27 of the interior wall 22.

Figure 7 shows an alternative configuration of a sealing, trimming or finishing strip. In this configuration, the materials 14 and 20 of the mounting part 8 and sealing part 6 are formed to define a so-called "cosmetic lip" 48. Such a cosmetic lip 48 is used to cover over, and to help secure, the edge of a trim

panel or the like inside the vehicle body. The cosmetic lip 48 is preferably co-extruded with the sealing part 6 and the mounting part 8.

The mounting part 8 and the sealing part 6 may also be provided with a covering layer 50. Such a covering layer may be a fabric layer. The covering layer 50 may provide the strip with a desired appearance (such as a particular colour). The covering layer 50 is advantageously provided to any of the embodiments described herein where the sealing part 6 is formed of foamed or cellular material, the covering layer 50 being a non-foamed or solid material.

In use, the mounting part 8 mounts the sealing part 6 around the frame of an aperture, so that the sealing part 6 extends around an opening (a door opening or a boot opening), on the outside of the vehicle body. The closing door or boot thus partially compresses the sealing portion 6 which thereby provides a weather-tight seal. When mounted in this way, the mouth of the channel 10 will of course face away from the centre of the door or boot opening.

In order to provide good sealing, it is desirable that the material 20 of the sealing part 6 should be very soft and flexible. In this way, it can provide effective sealing even if there are discontinuities or variations in the thickness of the flange and/or the abutment surface of the door or boot. Soft material is also advantageous because it may be of foamed or cellular form, and therefore light in weight. However, it is necessary for the strip 4 to be bent to follow

curves or corners in the door or boot frame. When bent in this way, there will be a tendency for the sealing part 6 to become wrinkled at the curves or corners as the strip 4 is bent to follow the curves or corners. The mouth of the channel 10 will be on the outside of the bend. The softer the material of the sealing part 6, the greater the tendency for this to wrinkle at the curves or corners will be. The interior wall 22 may act as a reinforcement to the sealing part 6, and may increase the stiffness of the sealing part 6 in the directions of arrows D (Figure 2) without reducing the effective softness in the direction of arrows E. The increased stiffness in the direction of arrows D reduces or substantially eliminates any tendency of the sealing part 6 to wrinkle at, or "bridge across", bends or curves in the mounting flange. In this way, therefore, it is possible for the sealing portion 6 to be made of substantially softer material because the increased tendency of such very soft material to wrinkle at or bridge across bends or corners is substantially eliminated by the presence of the interior wall 22.

The interior wall 22 may be formed of the same material 20, with the same hardness, as the remainder of the sealing part 6. Alternatively, the interior wall 22 may be formed of material which is harder than the remainder of the sealing part 6. In an alternative arrangement, the sealing part may be provided with a reinforcement (not shown) which is incorporated within the wall 22. The reinforcement may comprise a length of looped wire of generally zig-zag configuration, or could instead be a thin metal sheet. Other forms of

reinforcement are possible. Such a reinforcement could be incorporated into the wall 22 by co-extrusion during the extrusion process forming the sealing part 6. For example, reinforcements of the type described in our United Kingdom patent GB 2327451 (the content of which is fully incorporated herein by reference) may be provided in the interior wall 22 described herein.

As an alternative to the bulbous portion 27 being integrally formed with the wall 22, the bulbous portion could be formed integrally with one of the side walls 36,38 of the sealing part – forming a protrusion therefrom. In this embodiment there would only be a single hollow or void within the sealing part.

CLAIMS

1. A sealing, trimming or finishing strip comprising a longitudinally extending sealing part defining a longitudinal hollow interior which becomes partially compressed in use, the hollow interior of the sealing part being provided with means for controlling the compression of the sealing part.
2. A strip according to claim 1, in which the compression controlling means includes at least one abutment surface for abutting an internal surface of said hollow interior when relative movement between said internal surface and said abutment surface occurs in use in response to compression of the sealing part.
3. A strip according to claim 2, including two of said abutment surfaces for abutting spaced apart internal surface portions of said hollow interior.
4. A strip according to claim 2 or 3, in which the or each abutment surface is convex.
5. A strip according to any one of the preceding claims, wherein said compression controlling means comprises an interior wall spanning the hollow

of the sealing part and thereby defining first and second longitudinally extending hollows.

6. A strip according to claim 5, in which said interior wall includes a portion of relatively large cross-section.

7. A strip according to claim 6, in which said portion is of elliptical cross-section.

8. A strip according to claim 6 or 7, in which said portion of the interior wall spanning the hollow of the sealing part has a bulbous cross-section.

9. A strip according to any preceding claim, in which the sealing part is carried by a mounting part for mounting the sealing part at a position to seal an opening.

10. A strip according to claim 9, in which the interior wall spans the hollow of the sealing part near to but separated from the mounting part.

11. A strip according to claim 4, in which the mounting part is relatively rigid compared to the sealing part.

12. A strip according to claim 9,10 or 11, in which the mounting part comprises a reinforcing core or carrier.
13. A strip according to any one of claims 9 to 12, in which the mounting part is channel shaped.
14. A strip according to claim 13, in which the mounting part comprises integral gripping lips positioned on the opposite inside facing walls of the channels.
15. A strip according to claim 14, in which the gripping lips are relatively soft compared to the mounting part.
16. A strip according to any one of claims 9 to 15, in which the mounting part is made of extruded material.
17. A strip according to any preceding claim, in which the sealing part is made of extruded material.
18. A strip according to claim 17 when dependent on claim 16, in which the mounting part and the sealing part are co-extruded.

19. A strip according to any preceding claim, in which the strip also comprises a cosmetic lip.

20. A strip according to claim 19, in which the cosmetic lip extends from the region where the mounting part and the sealing part meet and covers the mounting part.

21. A strip according to any preceding claim, in which at least one of the mounting part and the sealing part are provided with a fabric covering.

22. A strip according to any preceding claim, wherein the sealing part comprises cellular or foamed material.

23. A strip according to any preceding claim, wherein the compression controlling means serves to reinforce the hollow interior and resists partial collapse of the hollow interior when longitudinal bending of the strip occurs so as to bend the longitudinal axis which extends along the hollow interior.

24. A sealing, trimming or finishing strip substantially as hereinbefore described with reference to, and/or substantially as illustrated in, any one of or any combination of the accompanying drawings.

ABSTRACT

SEALING, TRIMMING OR FINISHING STRIPS

A sealing, trimming or finishing strip 4 comprises a longitudinally extending sealing part 6 defining a longitudinal hollow interior which becomes partially compressed in use, the hollow interior of the sealing part being provided with means 27 for controlling the compression of the sealing part 6. In an embodiment described, the compression controlling means 27 comprises an interior wall 22 spanning the hollow of the sealing part and thereby defining first and second longitudinally extending hollows 24,26. The interior wall 22 includes a portion of relatively large cross-section, bulbous cross-section. The compression controlling means 27 may provide a “stop” which prevents or substantially reduces any further compression of the sealing part 6 beyond a desired amount. For example, when a vehicle closure member closes an opening in the vehicle body a peak force may be applied to the sealing part during the closing operation (for example, by a user to ensure that the closure member will be securely latched closed – such as when a car door is slammed shut). This peak force is applied only momentarily, and the compression controlling means 27 will limit the amount of compression of the sealing part 6 at this time, whereafter the force applied will be reduced.

[FIGURE 2]

1/10


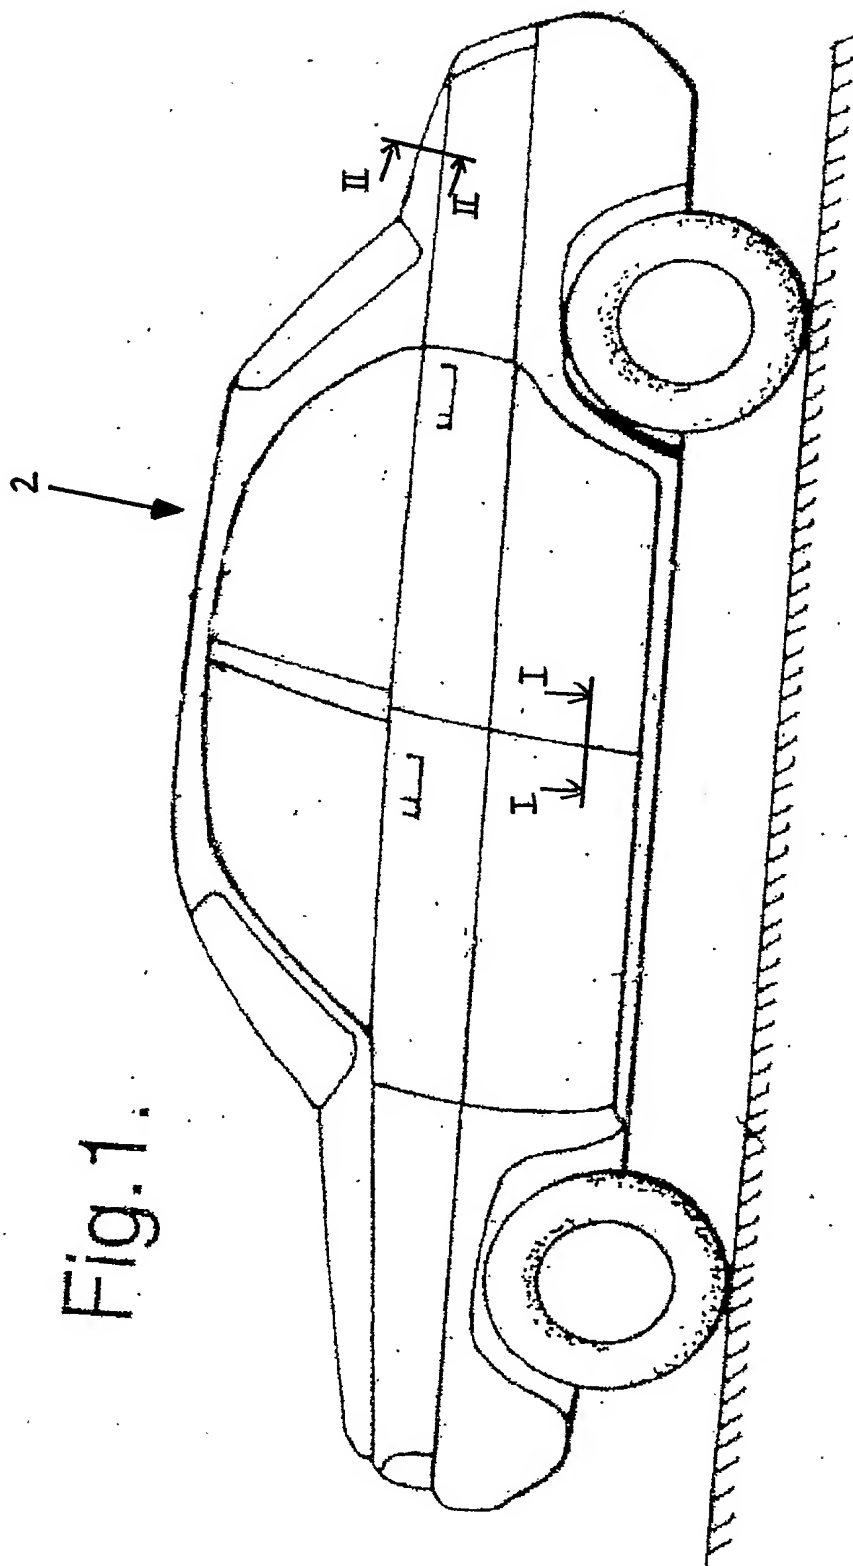


Fig. 1.




Fig. 2



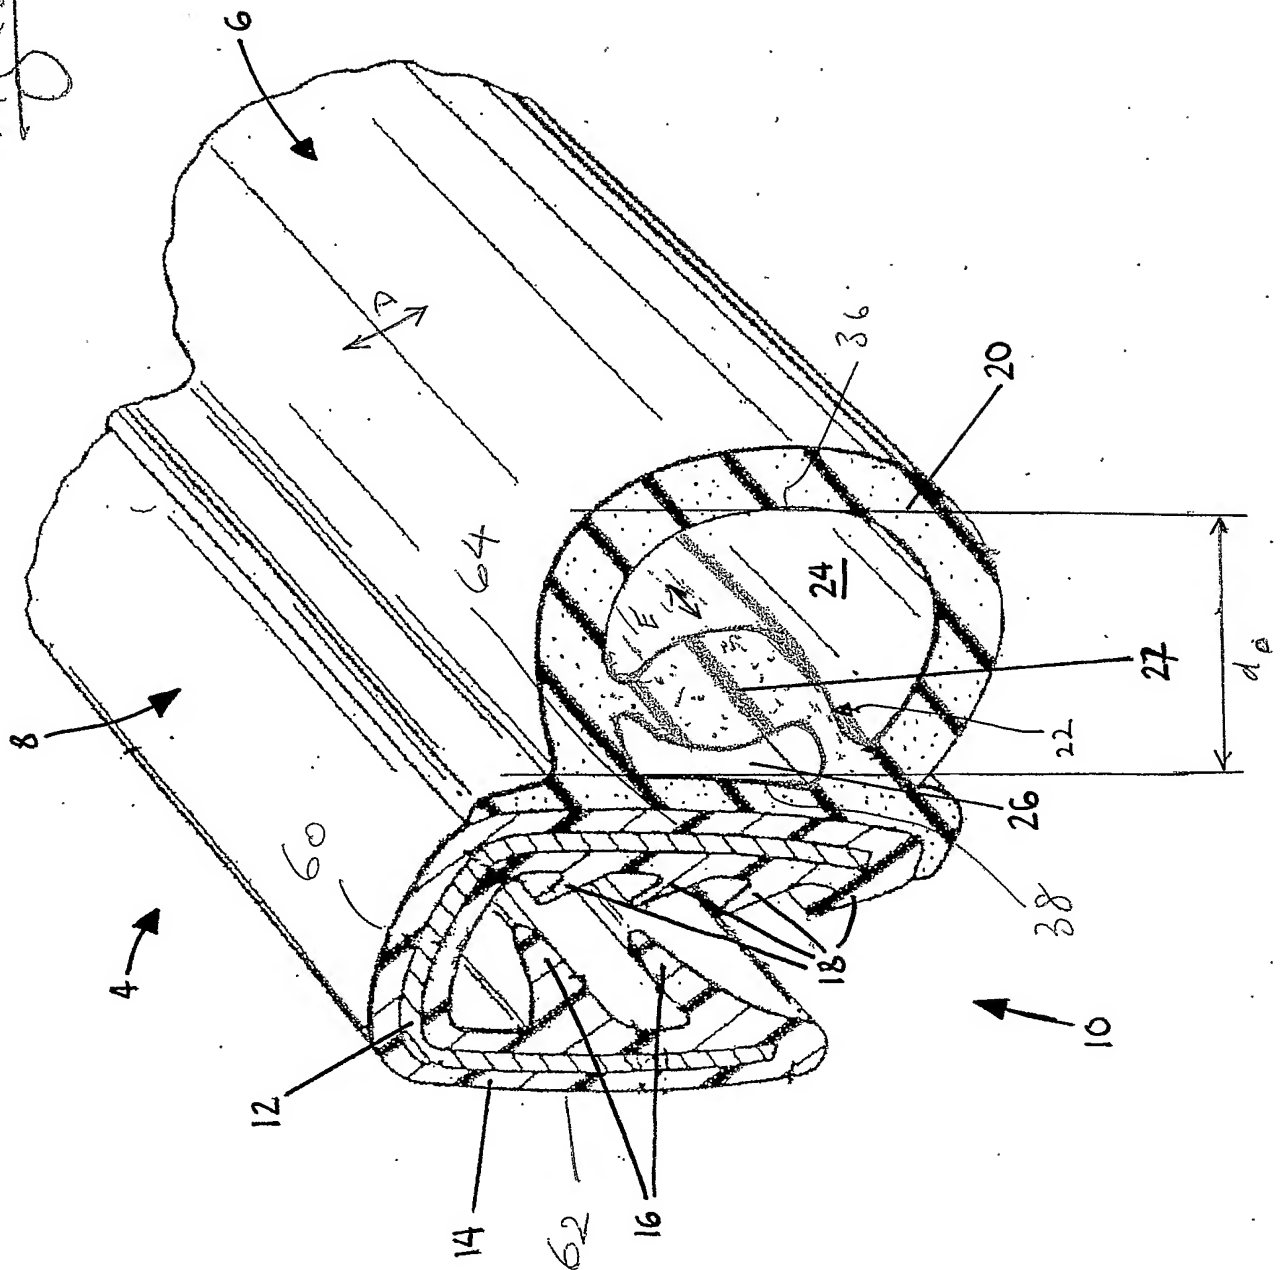


3/10

Fig. 3a

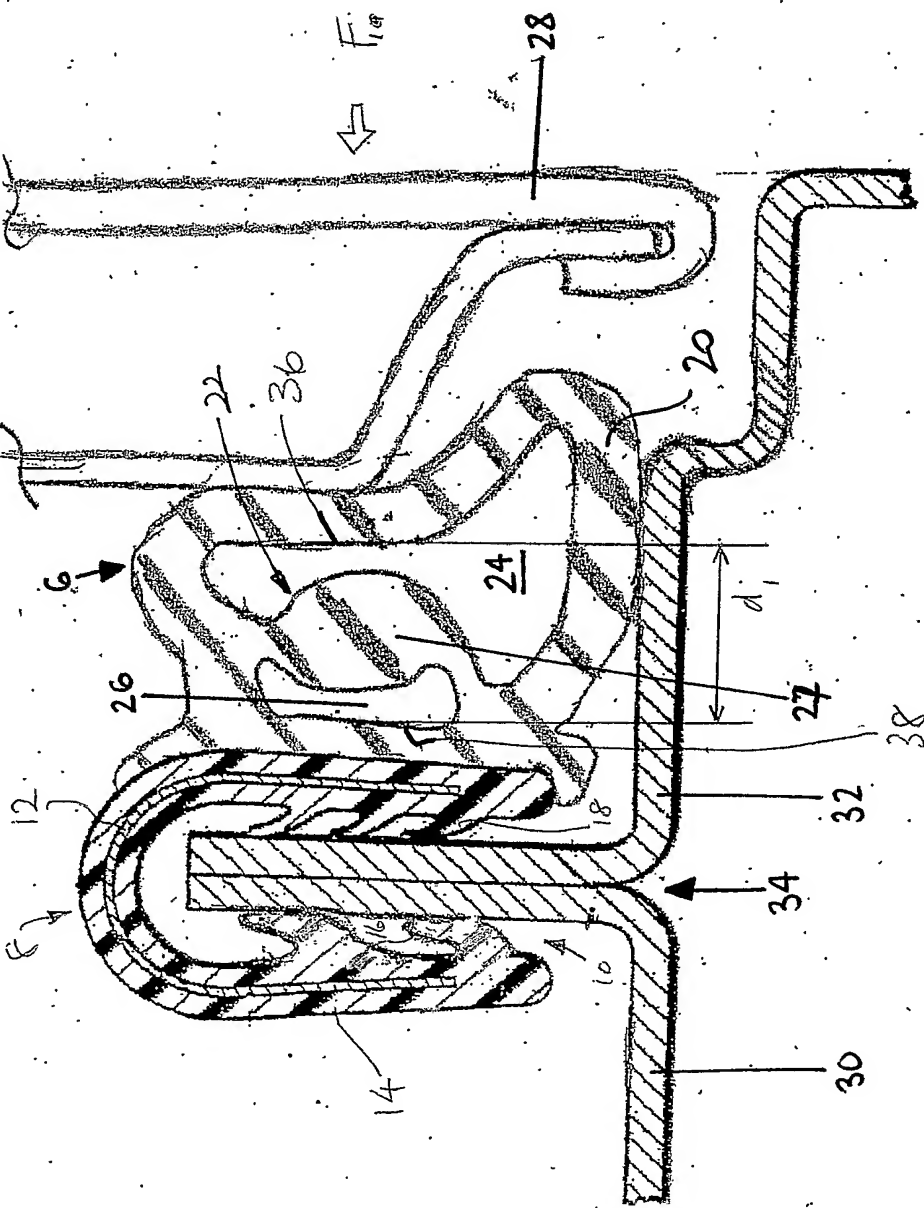


4/10

Fig. 3a

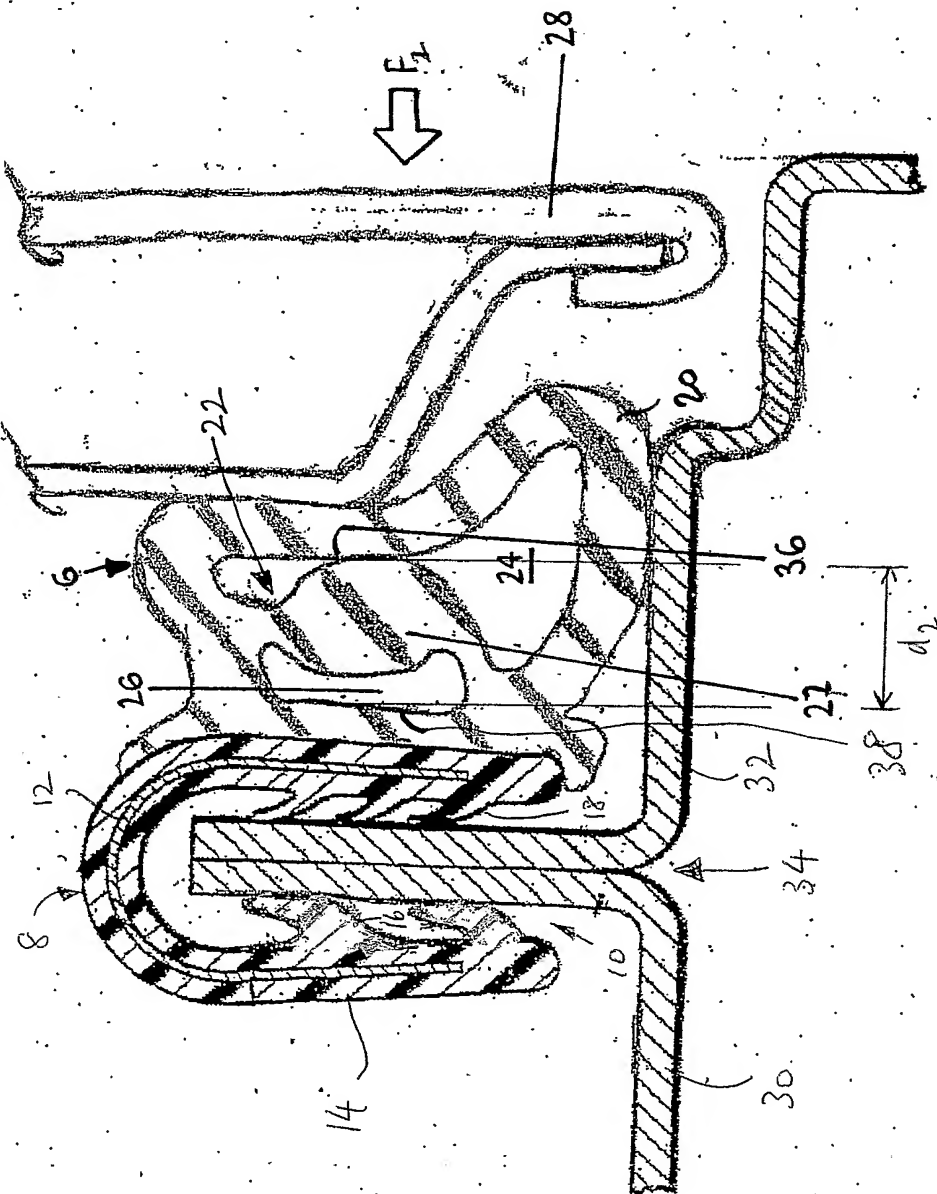




5/10

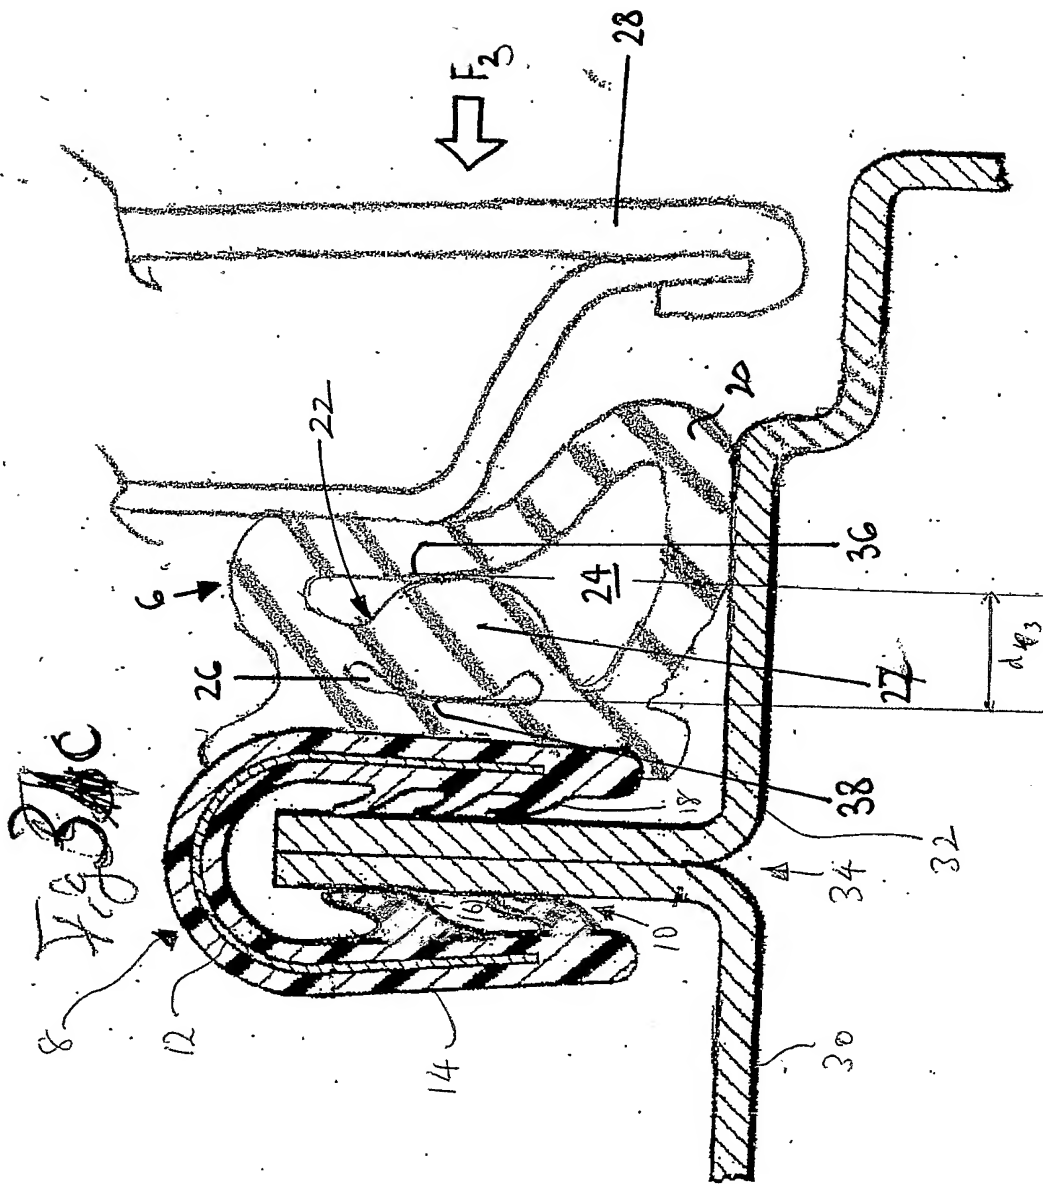




6/10

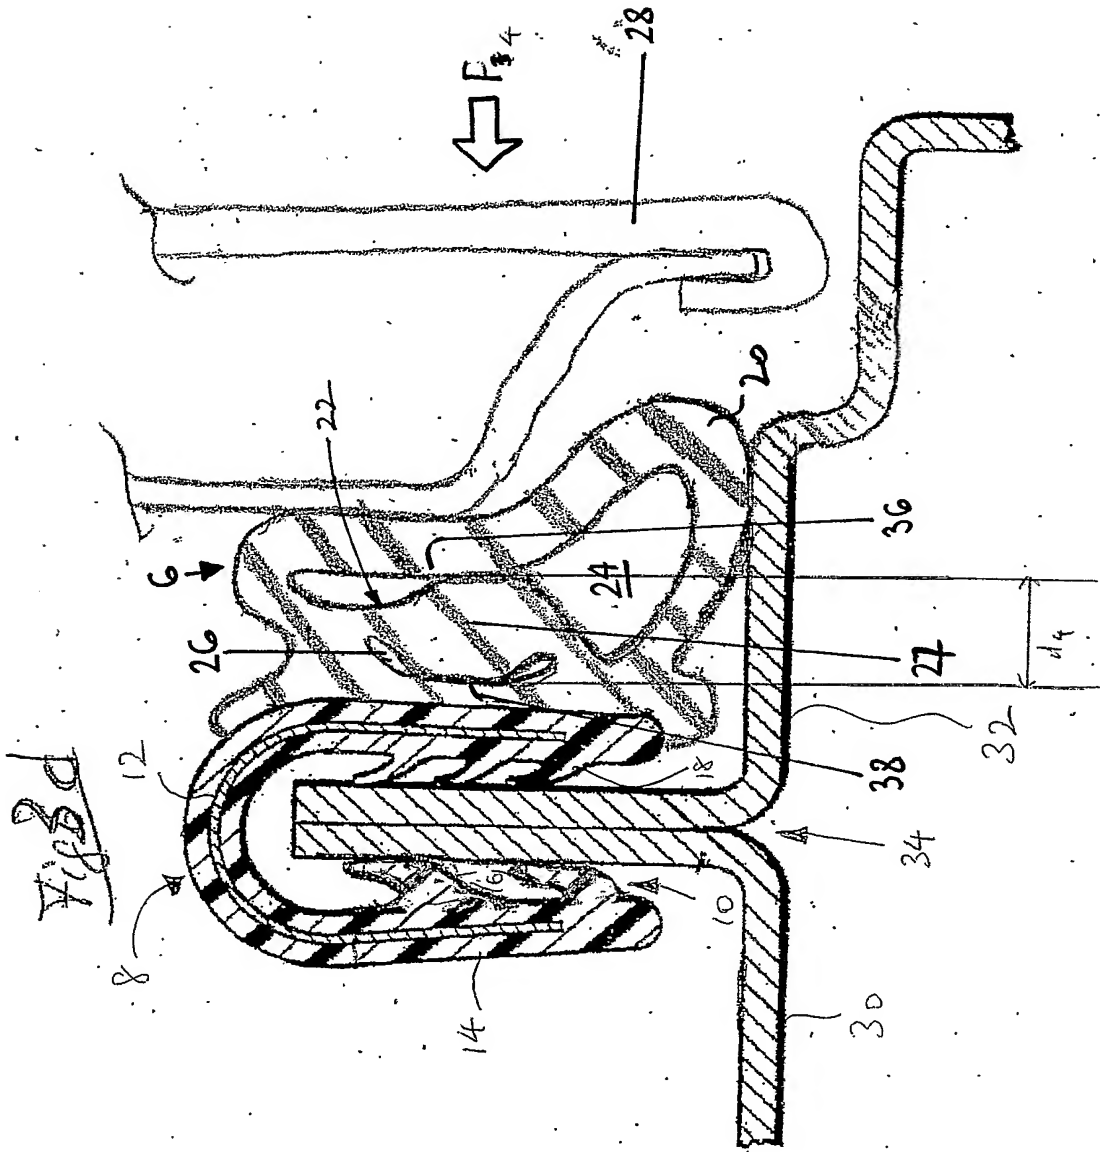

7/10

Fig. 4

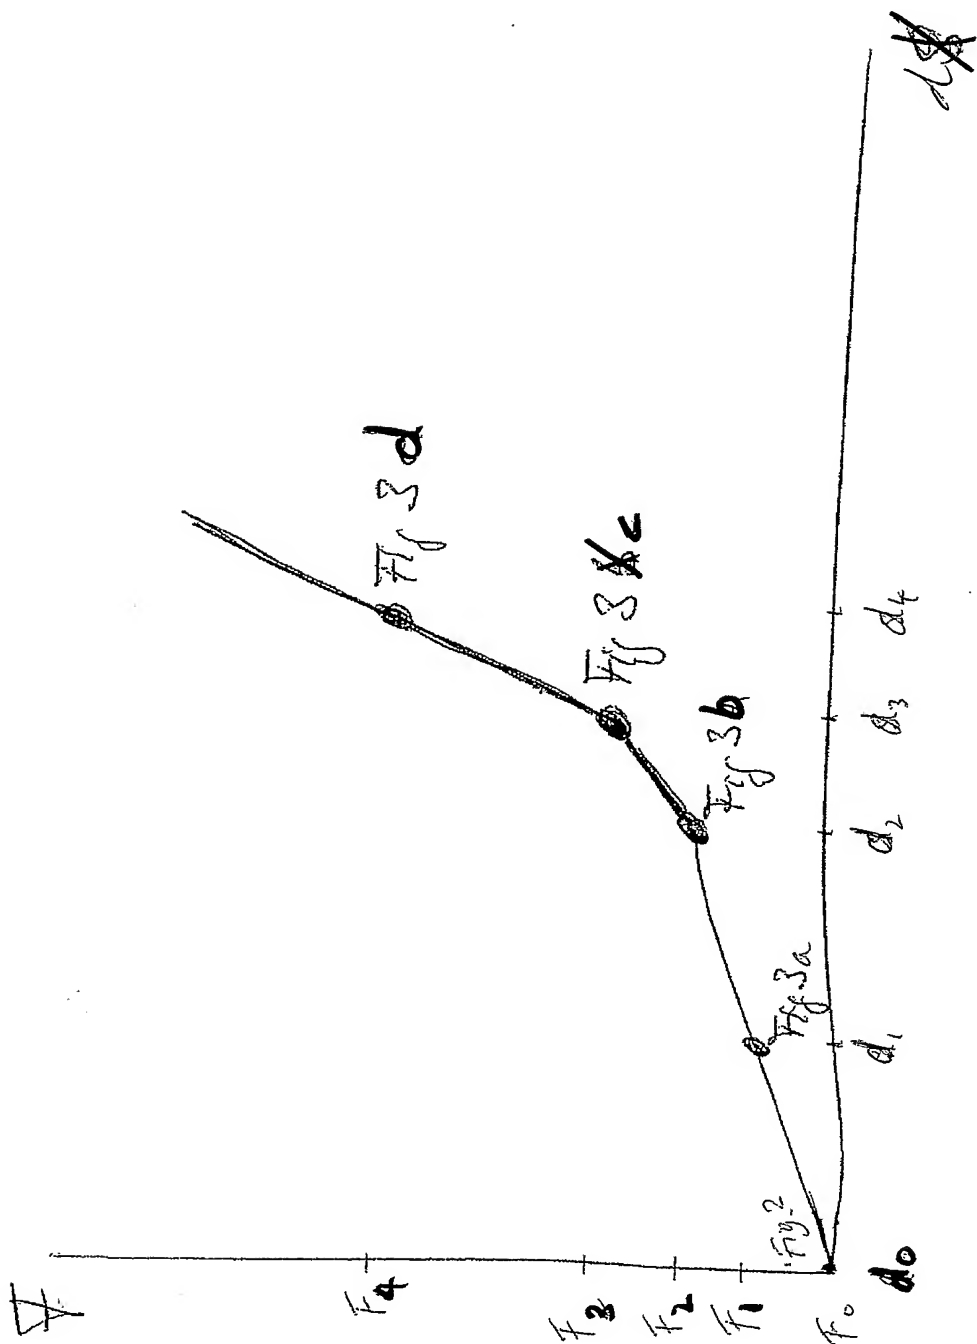




11

12

8/10



~~Fig. 1~~
Fig. 2

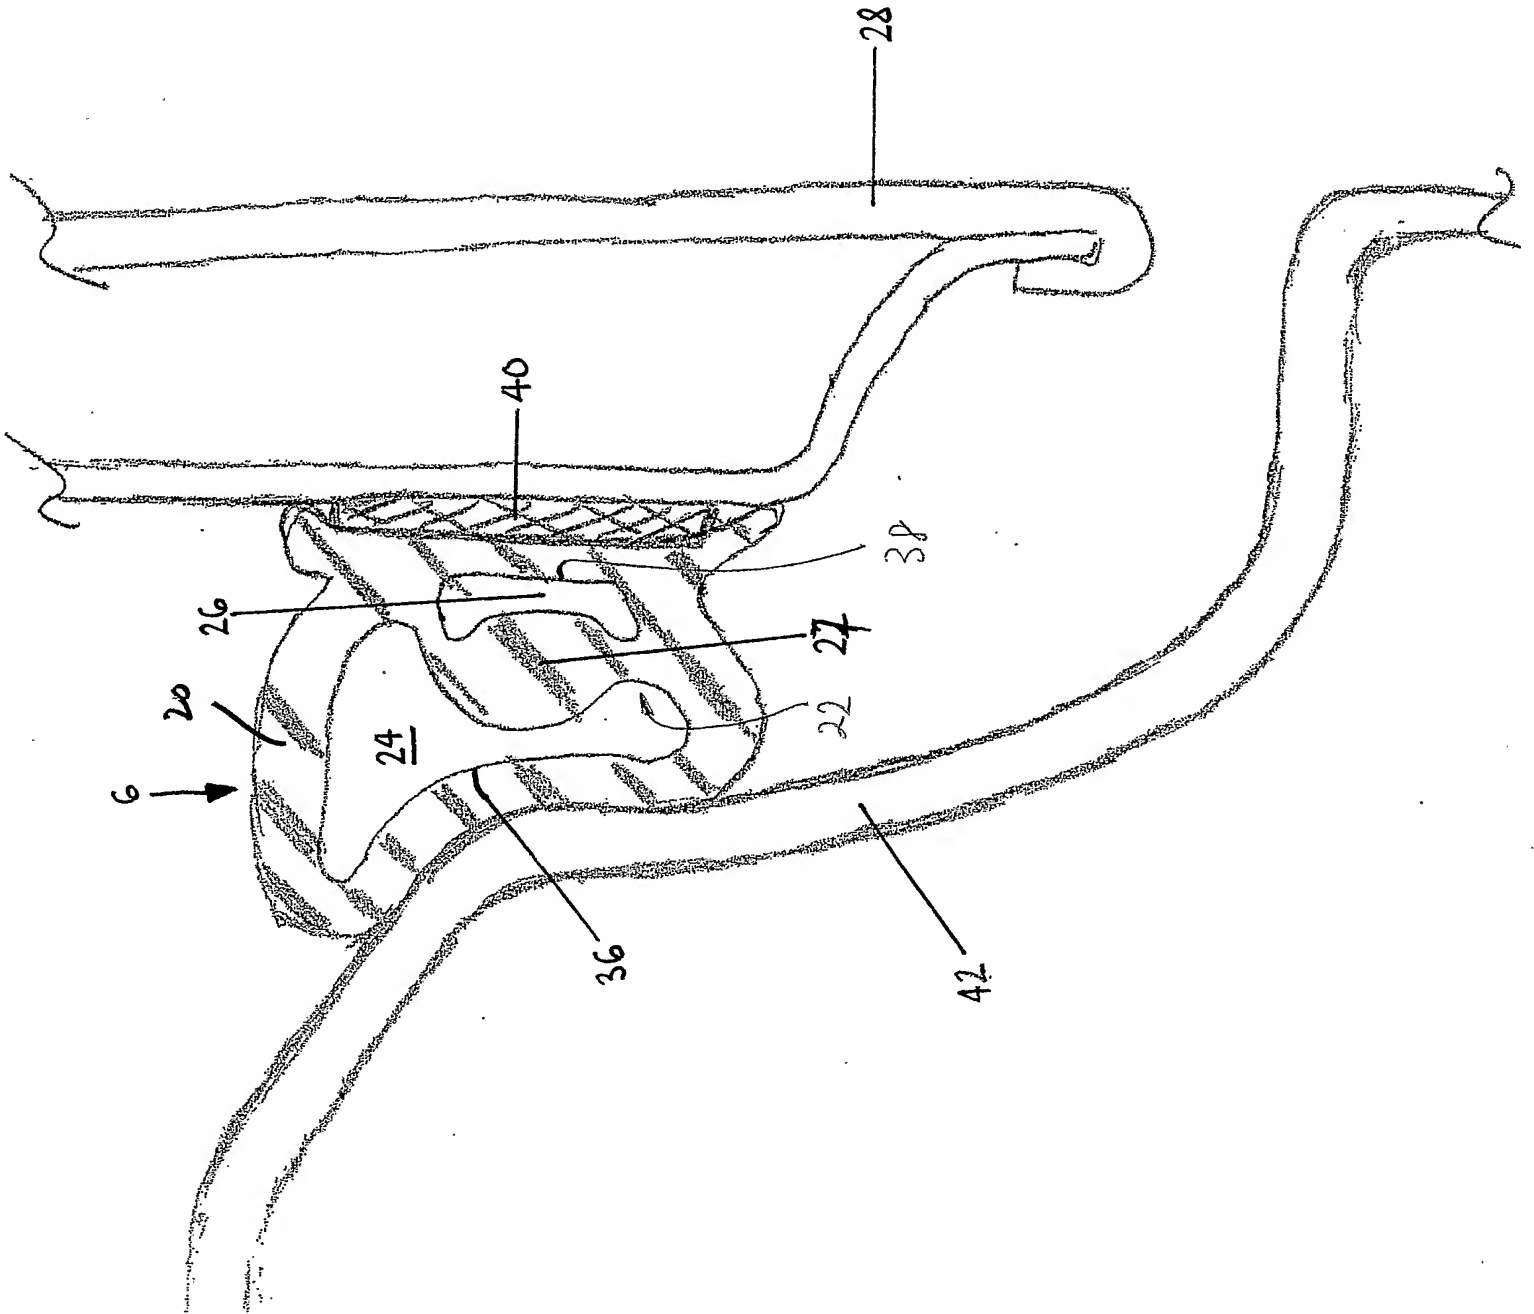



7

9/10

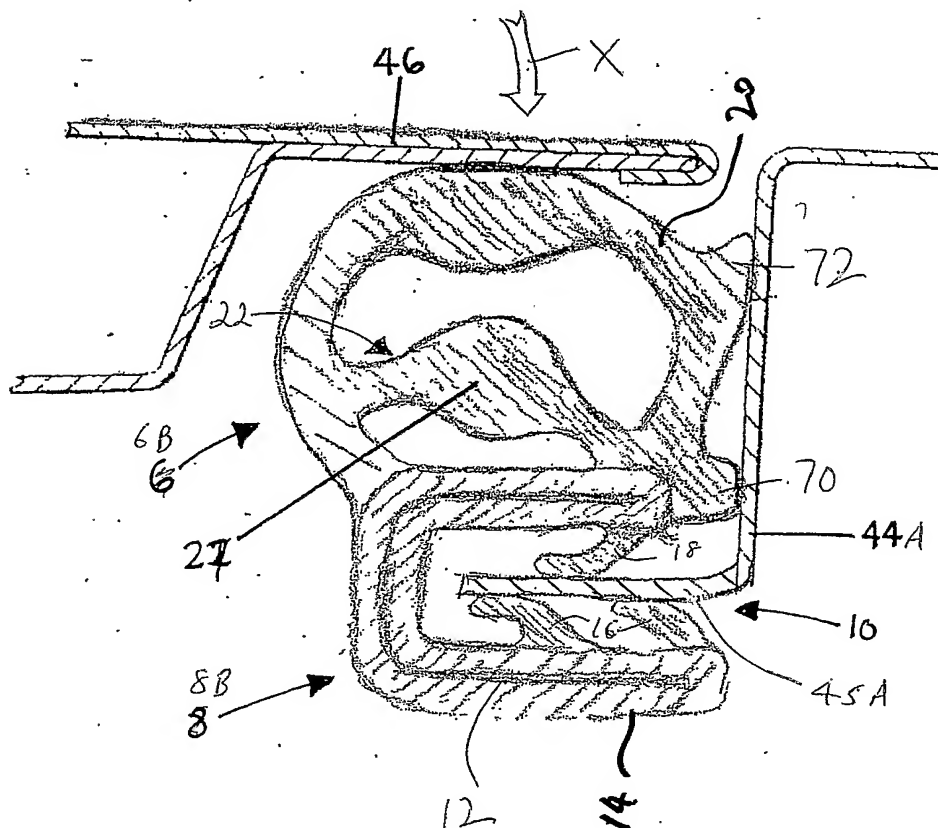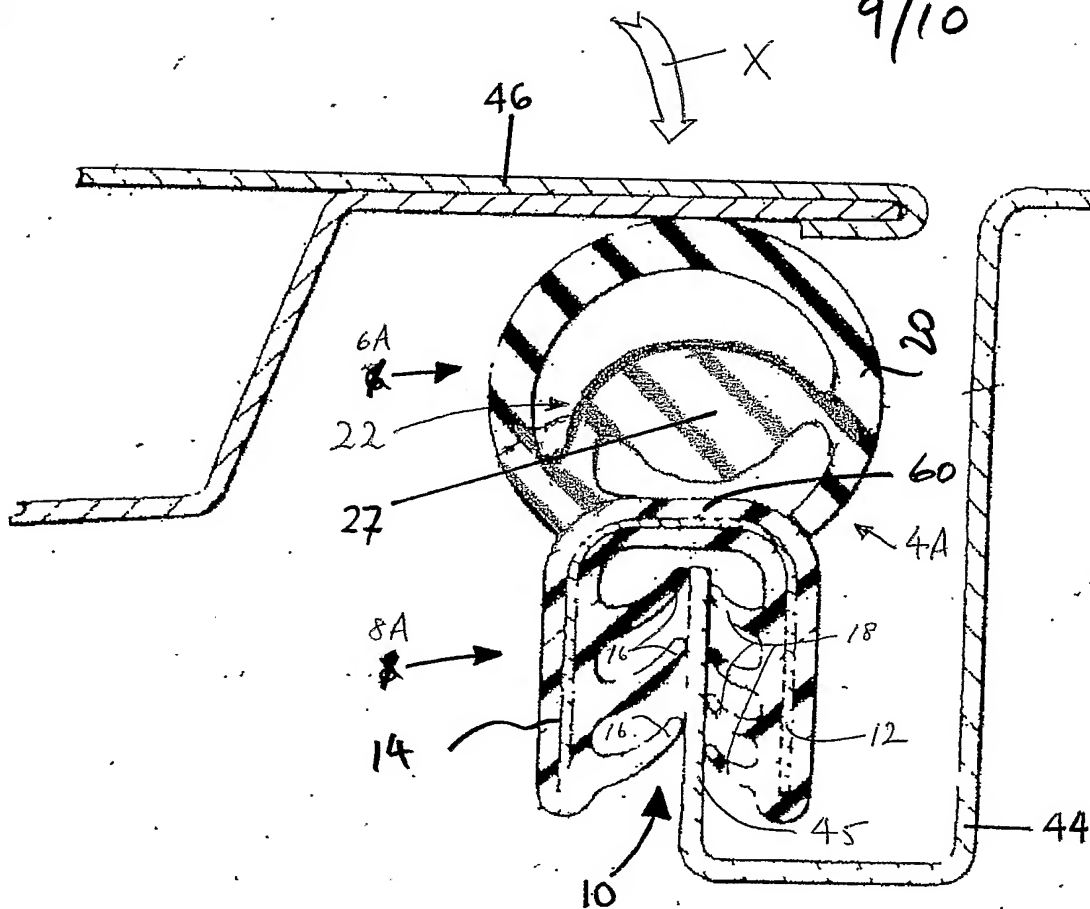




22

23

10/10

FIG. 7

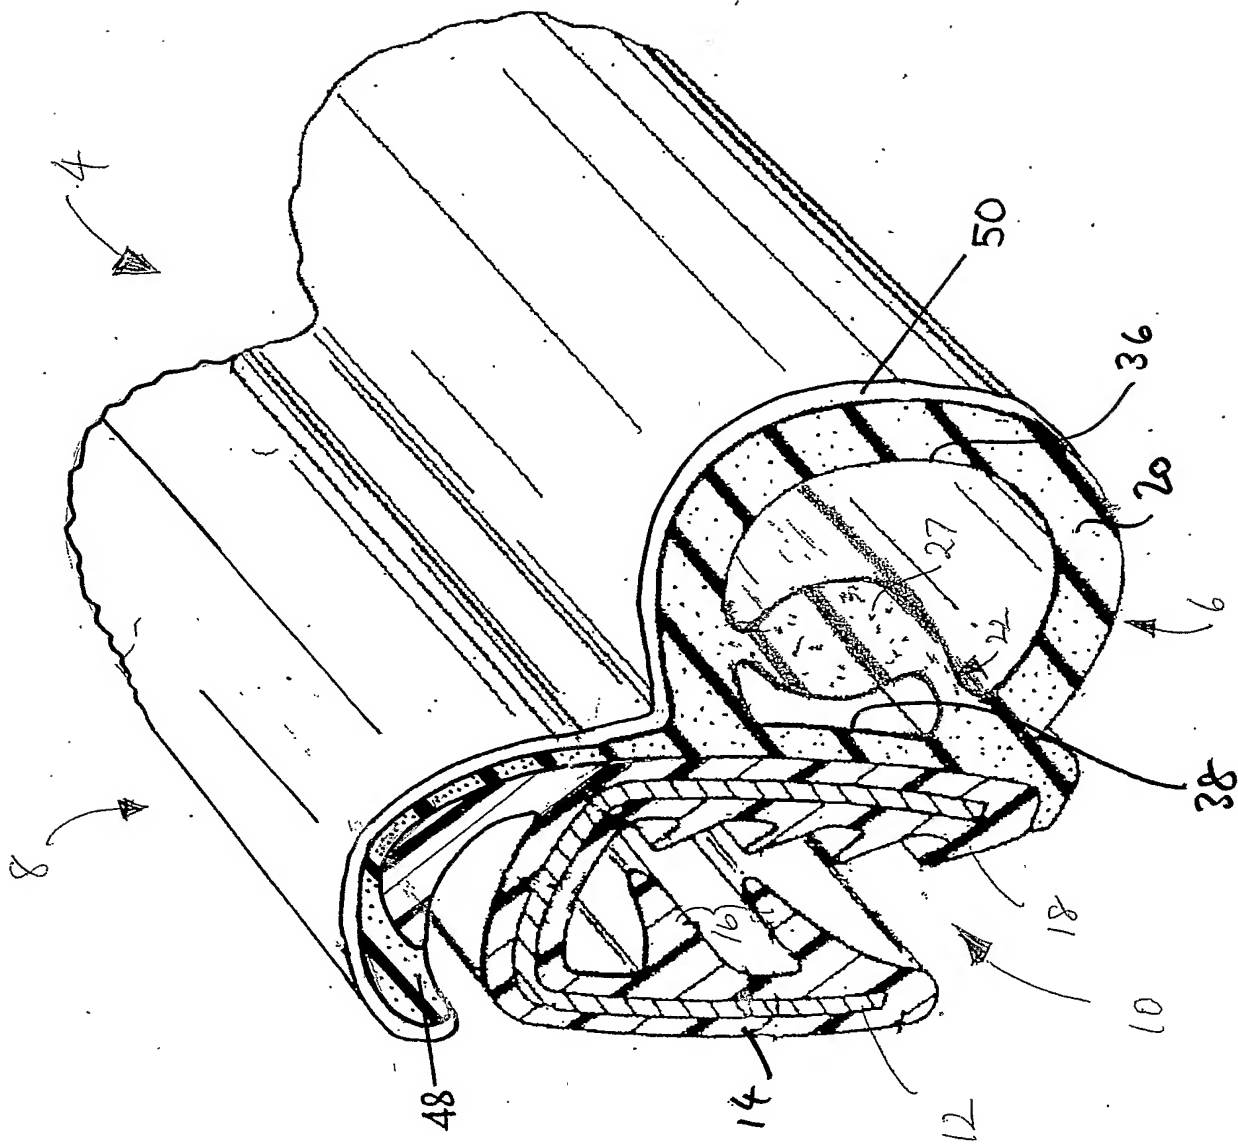

PCT/IB2004/004222

